



332AA-P Fiberglass Hull Board

Perforated Navy Cloth Facing

Description

332AA-P Fiberglass (Navy Cloth) Hull Board is composed of a lightweight, semi-rigid, incombustible fiberglass board with a perforated, durable white fiberglass cloth facing. The felted nominal 2.9 lb. density fiberglass base board offers low organic content.

The product can also be supplied with waffle board and perforated facing i.e. US NAVY MIL-A-23054. The faced insulation board is used to meet thermal and acoustical requirements for applications on bulkheads, decks, associated stiffeners and duct work on pleasure craft, workboats, ferries, cruise ships, military vessels, and offshore platforms.

Specifications

* Approved as meeting Parts 2 and 5 of Annex 1 of the IMO FTP code by the U.S. Coast Guard per 164.112/133/0

Advantages

Thermal Insulation – This effective insulation system (R Value 4.34 per inch) minimizes heat transfer / energy loss providing a more comfortable environment.

Quality Control – Panels are produced in compliance with an established quality control program, under follow-up service with Intertek Testing Services NA Ltd., a qualified independent third party inspection agency. This ensures consistent, high quality finished materials.

Noise Reduction – Perforated face enhances sound absorption.

Light Reflectance – Finished bright white panels improve visibility.

Installation


332AA-P Fiberglass (Navy Cloth) Hull Board is easy to cut and fit and installs with appropriate insulation pins, clips and tape. It can also be fabricated into wraps and other component covers.

Availability

Standard Sizes:

1" x 24" x 36" at 120 sf/ctn 1" x 24" x 48" at 160 sf/ctn
2" x 24" x 36" at 60 sf/ctn 2" x 24" x 48" at 80 sf/ctn

332AA-P Fiberglass (Navy Cloth) Hull Board is available through SPI service centers nationally. Call or visit our website to locate one near you.

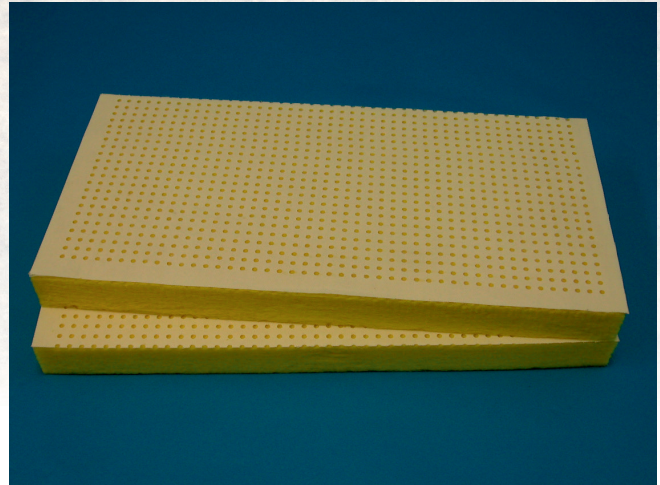

Performance Compliance Data

Facing: Color White, Perforated Glass Cloth, 13.5 oz. / sq. yd.
Complies to Mil-C-20079H Type 1 Class 2

Base Board: Complies to MIL-I-742, Type II
Operating Temperature Limit: 450°F (232°C)
Nominal Density 2.9 pcf (46.5 kg/m³)

Thermal Conductivity

Mean Temperature		Thermal Conductivity	
°F	°C	Btu·in/(hr·ft ² ·°F)	W/m·°C
75	24	0.23	.033
100	38	0.25	.036
200	93	0.31	.045

Sound Absorption Coefficients

Complies with MIL-I-22023D Requirements


Mounting Type A (Flat on the floor) [Formerly No. 4]

Thickness	Frequency, Hz								
	inches	mm	125	250	500	1000	2000	4000	NRC*
1	25	0.06	0.29	0.75	0.99	1.04	1.02	0.75	
2	51	0.24	1.00	1.11	1.08	1.06	1.05	1.05	

*Noise reduction coefficient.

Base Board SCS Certified - Minimum 25% Recycled Content

Note: properties as reported by base board manufacturer



1408/12


This product is subject to Follow-Up Service Inspections by Intertek

332AA-P Fiberglass (Navy Cloth) Hull Board Quote / Order Form

		DATE
COMPANY	CONTACT	PHONE
PROJECT NAME & LOCATION		DATE REQUIRED
SHIP TO LOCATION		P.O. NUMBER

332AA-P Fiberglass (Navy Cloth) Hull Board	Board Size (inches & Sq. Ft.)			
	Thickness	Width	Length	SF
Accessories	Length	Size	Diam.	Quantity
Insulation Stick Pin				
White Navy Washers	N.A.			
Std. Lock Washers	N.A.			
Joint Tape	N.A.		Roll	

Note: Final quantities rounded to full carton or packaged quantities.

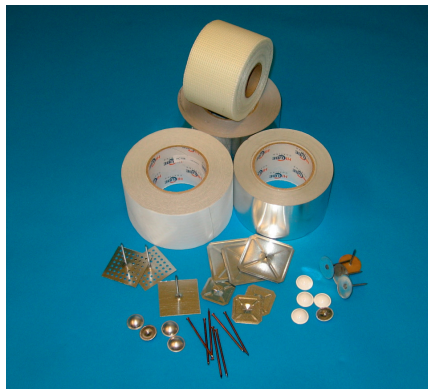

SPI Specialty Products & Insulation

c/o Dune Point Capital
 411 Theodore Fremd Ave.
 Rye, NY 10580
 Phone: (855) 519-4044

Web: www.spi-co.com

E-mail: fabteam@spi-co.com

April 2019 - 332AA-P Fiberglass Hull Board

Disclaimer and Limitation of Warranty. The purchaser/user is advised to consult with the appropriate professionals and to read the manufacturer's product information to determine the adequacy or appropriateness of the product for the use intended. SPI makes no claim or representation regarding the use or applicability of the products. Further, SPI makes no warranty, expressed or implied, and disclaims all warranties including warranties of merchantability and fitness for a particular purpose.

*For additional information visit
<http://www.spi-co.com>*

*Please ask your SPI Sales Representative about
 other fabrication products and services.*